

HEATSTRIP®


OUTDOOR HEATERS



Heating with *Style*



HEATSTRIP® 
CLASSIC

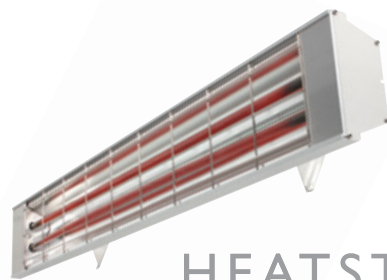

HEATSTRIP® 
MAX



Heatstrip Classic, the Ultimate in Outdoor Heating

The Heatstrip Classic is an Australian designed & engineered range of premium quality, stylish & slimline electric radiant heaters ideal for protected outdoor and indoor heating applications. This includes your alfresco and outdoor dining area, patio, pergola, verandah, garage and shed, as well as cafés, restaurants, factories, showrooms, warehouses etc.

- Stylish, slimline, unobtrusive design
- Efficient, cost effective electric heating
- Significant running cost savings compared to bottled gas heaters
- Radiant heat means gentle comfortable warmth
- Corrosion protected for even the toughest environment
- Easy DIY installation for 3 models and multiple mounting options
- 2 year residential warranty (1 year commercial)

General Technical Data

Model	Running* Costs	Power (Watts)	Current (Amps)	Dimensions (mm)	Weight (Kg)	Lead Length (mm)	Plug	Heating Area (m ²)
THH1500A	30c / hr	1500	6.3	924 x 165 x 48	5	1000	Yes	2-3
THH1800A	36c / hr	1800	7.5	1104 x 165 x 48	6	1000	Yes	3-4
THH2400A	48c / hr	2400	10	1364 x 165 x 48	7	1000	Yes	4-5
THH3200A	64c / hr	3200	13.3	1774 x 165 x 48	9	500	No	5-6

*Running costs based on \$0.20/kWh. Heating area is for a protected outdoor site

Minimum Mounting Height	Recommended Range	Maximum Height
2.1m	2.3m - 2.5m	2.7m

For higher ceiling, units can be lowered using chains & wires or optional bracket kits or use Heatstrip Max


Running Cost	Outdoor Gas Heater	Heatstrip Classic electric heater			
		THH1500A	THH1800A	THH2400A	THH3200A
Per Hour*	\$2.77/hr	\$0.30/hr	\$0.36/hr	\$0.48/hr	\$0.64/hr

*Costs based on an electricity rate of 20.0 cents/kWh. Calculations of hourly running cost for outdoor gas heater is based on \$25.00 average to fill a 9kg gas bottle and average running time of 9 hours. \$25.00 / 9 hours = \$2.77 per hour

Materials of Construction

High temperature ceramic coated extruded alloy

Mounting Options

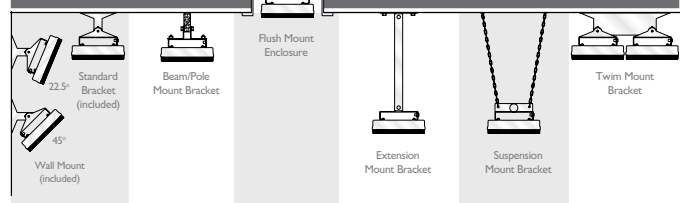


Included as Standard

Optional Accessories

Model	THHAC-001	THHAC-009	THHAC-005 (300mm)	THHAC-002	THHAC-016
THH1500A					
THH1800A		THHAC-010	THHAC-006 (600mm)		
THH2400A		THHAC-011	THHAC-007 (900mm)		
THH3200A		THHAC-012	THHAC-008 (1200mm)	THHAC-003	

Table layout

Approximate number of heaters required to heat common residential table settings

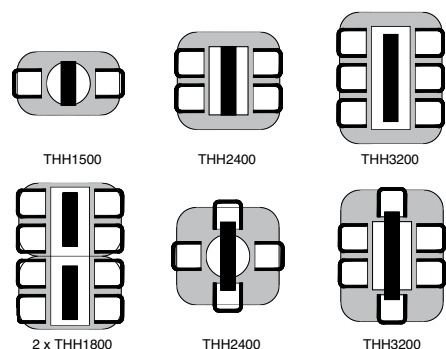



Heatstrip Max, Innovative, High Performance Electric Heating Technology

Heatstrip Max is an Australian designed and engineered range of high intensity electric, infra-red radiant heaters ideal for tough outdoor and indoor heating applications.

Heatstrip Max has been specifically designed where all others heaters have failed - a high temperature radiant heater with a unique low-glow, shatter proof heating element, perfect even for fully exposed locations. Applications include outdoor alfresco areas, balconies, pergolas, patios, verandahs, courtyards, garages, sheds, warehouses, showrooms, halls etc.

- High temperature electric radiant heater ideal for higher ceilings or more exposed locations
- Unique "low glow" incoloy element – no more blinding light
- Significant running cost savings compared to bottled gas heaters
- Commercial grade quality and construction – 2 year warranty
- Corrosion resistance provided by the anodized alloy casing
- 2 models – DIY (THX 2400) or hard wired (THX 3600).

General Technical Data

Model	Running* Costs	Power (Watts)	Current (Amps)	Dimensions (mm)	Weight (kg)	
THX 2400	48c / hr	2400	10	854 x 170 x 80	6	Supplied with lead & plug -DIY
THX 3600	72c / hr	3600	15	1184 x 170 x 80	8	Must be hard wired

*Running costs based on \$0.20/kWh

Heated Area (m ²)	Indoor Protected (m ²)	Outdoor Enclosed (m ²)	Outdoor Exposed (m ²)
THX 2400	16	10	6
THX 3600	24	15	9

Running Cost	Outdoor Gas Heater	Heatstrip Max electric heater	
		THX2400	THX3600
Per Hour*	\$2.77/hr	\$0.48/hr	\$0.72/hr


*Costs based on an electricity rate of 20.0 cents/kWh. Calculations of hourly running cost for outdoor gas heater is based on \$25.00 average to fill a 9kg gas bottle and average running time of 9 hours. \$25.00 / 9 hours = \$2.77 per hour

Model	Min. Mounting Height	Recommended Height	Max. Height Outdoor	Max. Height Indoor
THX 2400	2.1m	2.3m to 2.8m	3.0m	3.5m
THX 3600	2.1m	2.3m to 2.8m	3.0m	3.5m

Materials of Construction

Anodised alloy casing and end caps with chromed grille

Mounting Options

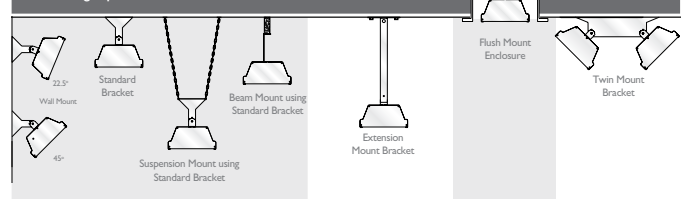


Included as Standard

Optional Accessories

Model	THX2400	THHAC-005 (300mm)	THXAC-030	THXAC-018
	THX3000	THHAC-006 (600mm)	THXAC-031	
		THHAC-007 (900mm)		
		THHAC-008 (1200mm)		

Table layout

Approximate number of heaters required to heat common residential table settings

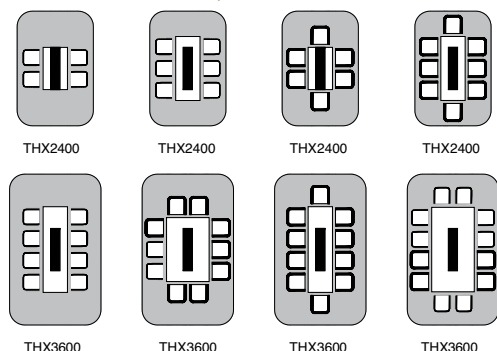



Which Product do I need?

Application	Heatstrip Classic (THH-A)	Heatstrip Max (THX)
Outdoor Heating – undercover, well protected area with ceiling height less than 2.7m (al-fresco, verandah, café)	✓	✓
Outdoor Heating – undercover, well protected area with ceiling height from 2.7m to 3.0m (al-fresco, verandah, café)		✓
Outdoor Heating – exposed area (al-fresco, café, verandah, balcony)		✓
Indoor insulated areas – commercial (classrooms, offices, nursing homes, hospitals) residential (shed, garage etc)	✓	
Indoor open, un-insulated areas requiring spot heating - factory, halls, warehouse, workshop, sports facility	✓	✓

Optional Controller


Model TT-MTM allows easy On/Off, Timer & Heat control of Heatstrip heaters



- Simple On/Off function with LED indicators
- 3 Heat Settings – High / Medium / Low
- Automatic timer – 1 / 2 / 4 hour options
- Suitable for operation of single or multiple heaters
- Must be hard-wired. Max, 14 amp direct wired
- Not included as standard. Must be purchased separately

Maximum Mounting Height Options

Ceiling heights are very important when deciding on which Heatstrip is best.

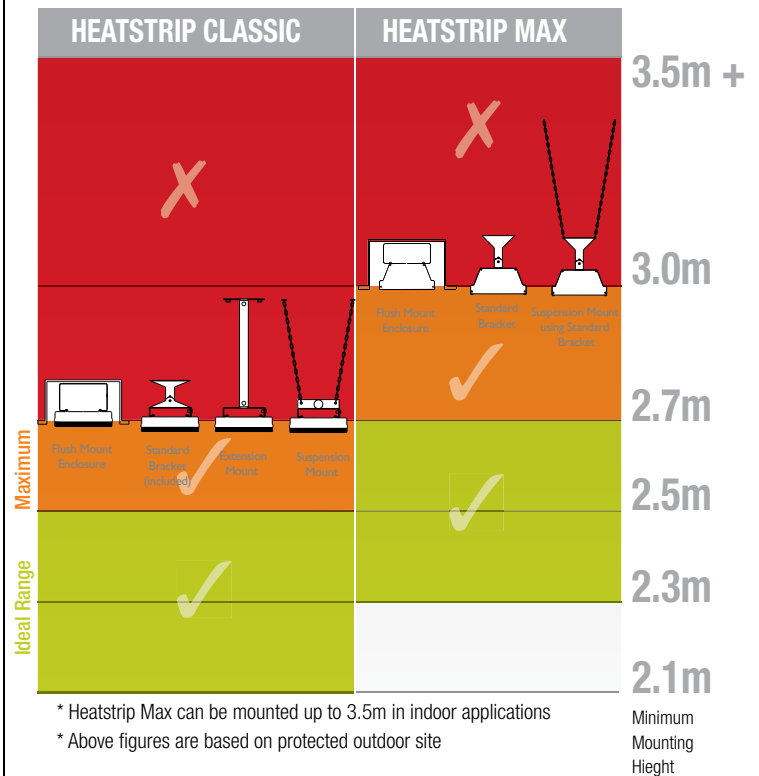

Mounted directly overhead is preferred and provides maximum coverage



Angled mounting from the wall or ceiling is possible with the standard bracket, however the heating area is reduced